


### **ELEVATING ARTISTRY**







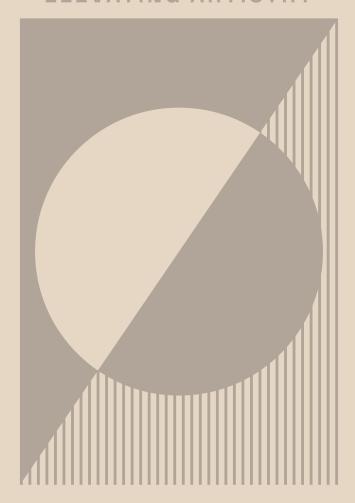


## Décor Story


The Décor Collection offers an array of design options to cater to various aesthetics and preferences. From classic patterns that exude timeless charm to contemporary designs that embrace modern sensibilities, these tiles are versatile and adaptable to a wide range of interior styles.

With their impressive size and high-quality finish, these tiles effortlessly enhance the visual appeal of any room, making them a perfect choice for creating feature walls, backsplashes, or flooring that demands attention. Elevate your space with the Décor Collection, where every tile is a masterpiece in its own right, and every room becomes a work of art.



800 x1600mm

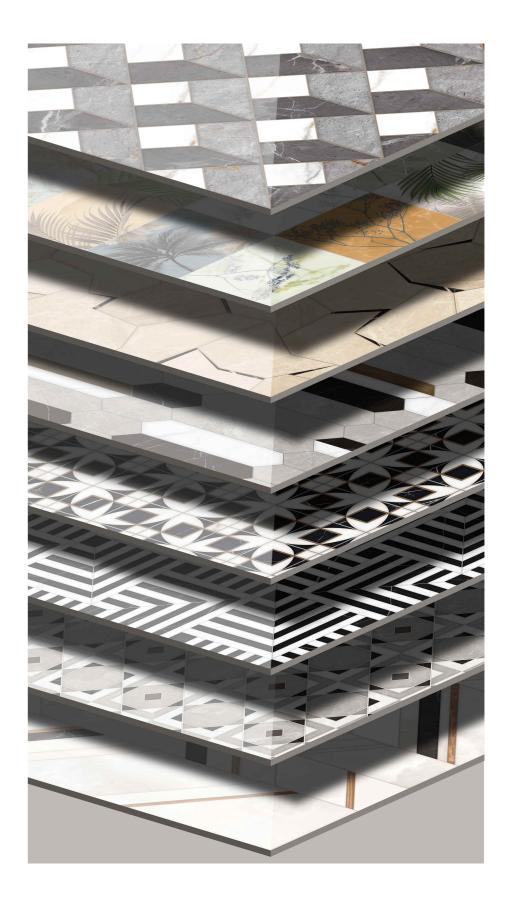

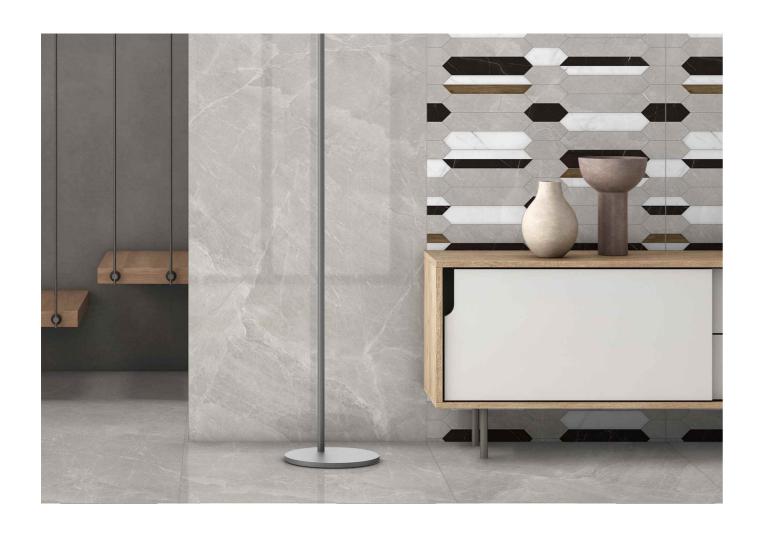

# **Application Areas**



MALLS







RESIDENTIAL

RESTAURANT

HOTELS





TRAIN STATION

Feel the creative freedom of impressive formats

Décor tile can be an extremely resilient floor covering that endures high-traffic areas with an adequate finish. Décor tile is first-rate, with unrivaled quality and appeal. These tiles are for use, among several other locations, in bedrooms and living rooms.



9MM Thickness



Easy to Reuse Install



Resistance



Chemical

Resistance





Thermal

**Impact** 

Ecological Finish

Anti-slip Finish.



Fire Proof



### **Product Features**

Décor tiles are the ideal choice for flooring as it's tough and does not easily deteriorate. As well as Décor tile is also more comfortable to walk on because of its modest softness to the touch.











**Passion Grey** 

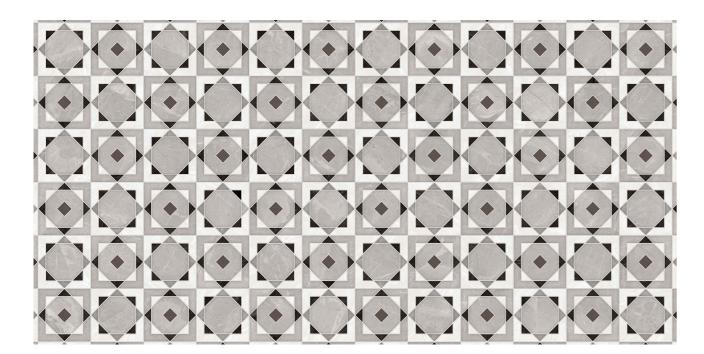

Passion Grey Décor - 1



Endless - 4 Faces

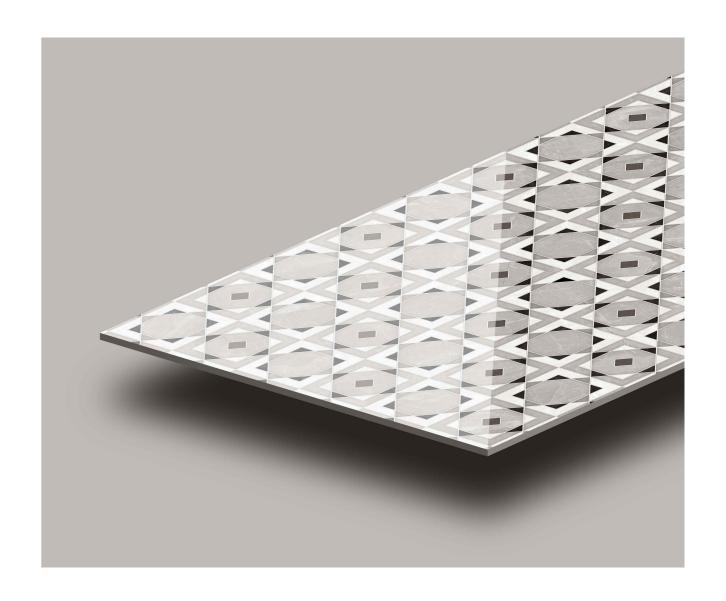








**Passion Grey** 



Passion Grey Décor - 2



Endless - 4 Faces

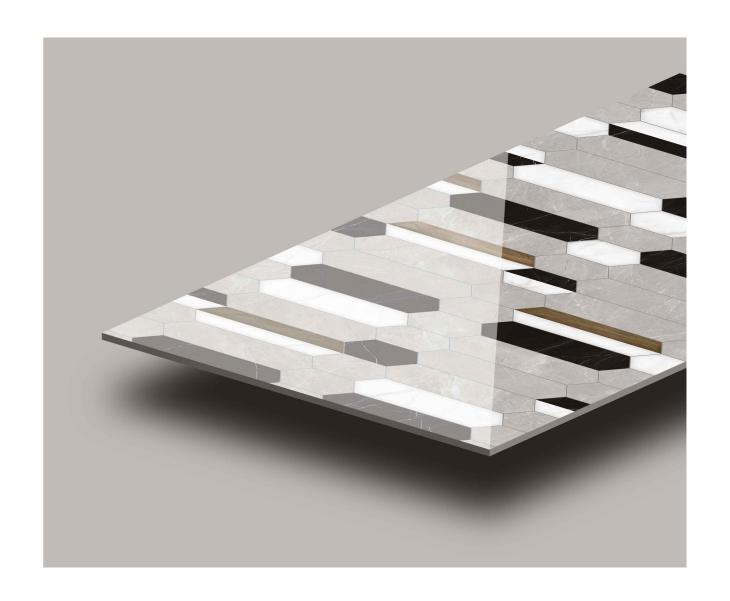








Swiss Onyx



Swiss Onyx Décor



Endless - 4 Faces

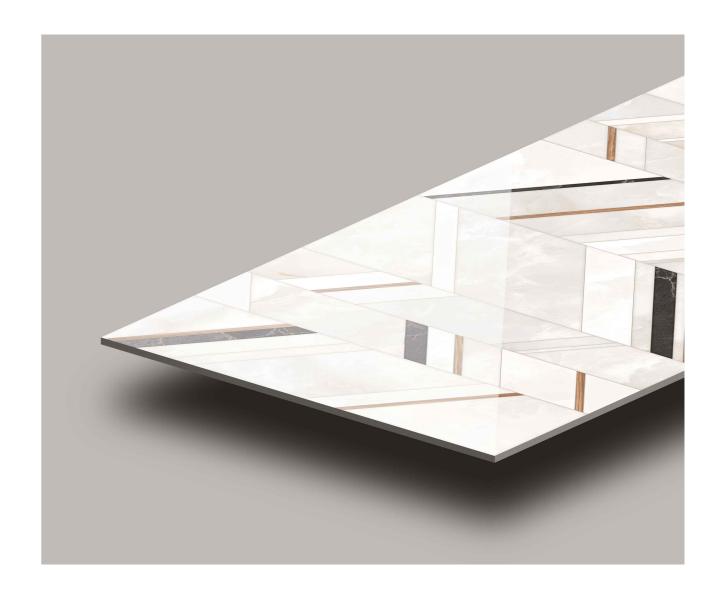










Statuario Regal

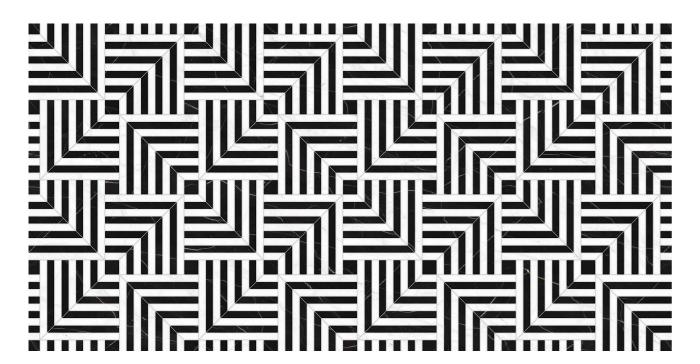

Statuario Regal Décor - 1

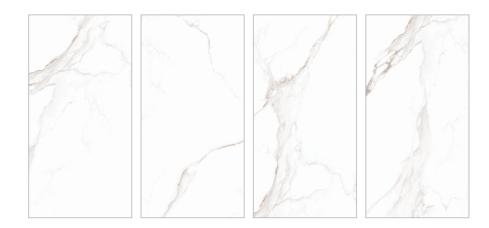

Random - 5 Faces

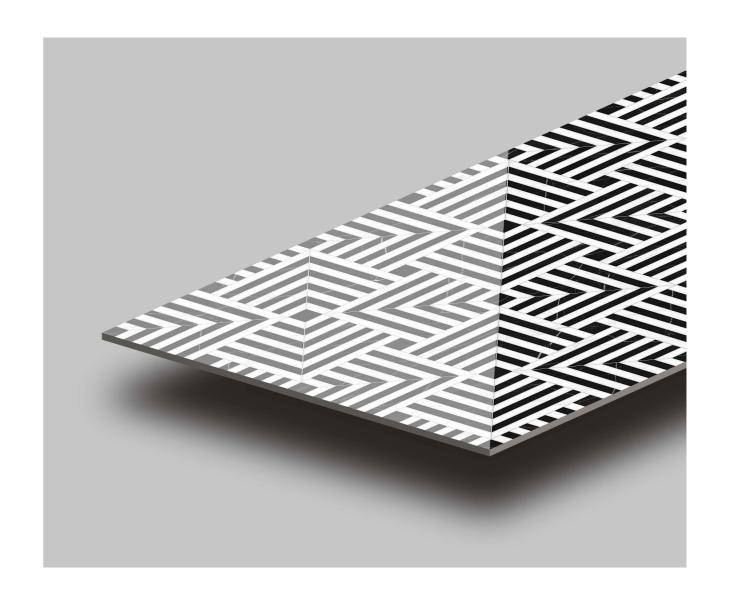










Statuario Regal

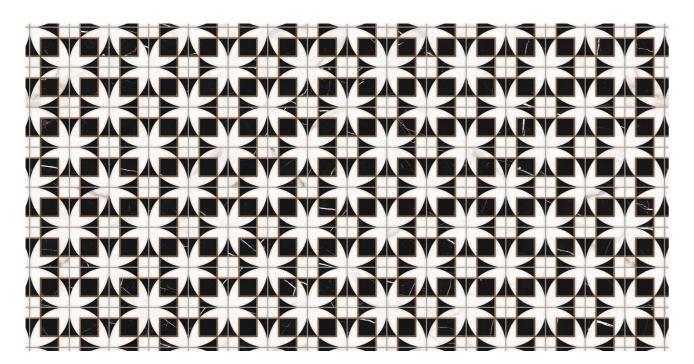

Statuario Regal Décor - 2

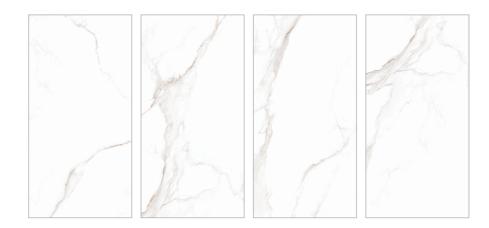

Random - 5 Faces

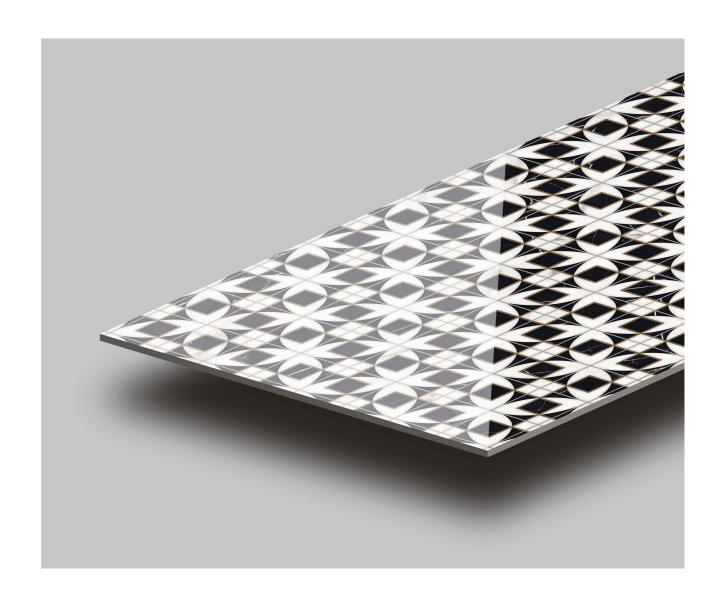







Domino Crema



Domino Crema Décor



Endless - 4 Faces










Carnico Grey



Carnico Grey Décor



Random - 4 Faces

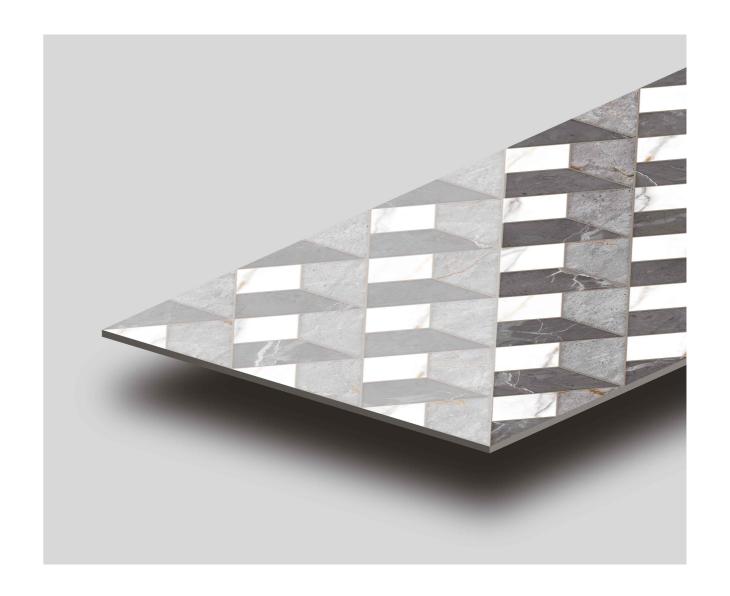









Calacatta Bronzo



Carnico Grey Décor

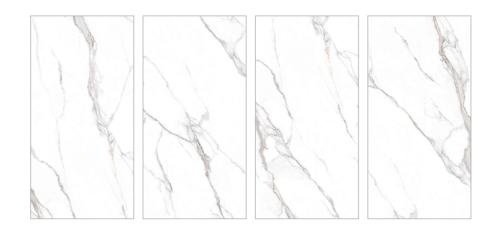

Random - 4 Faces

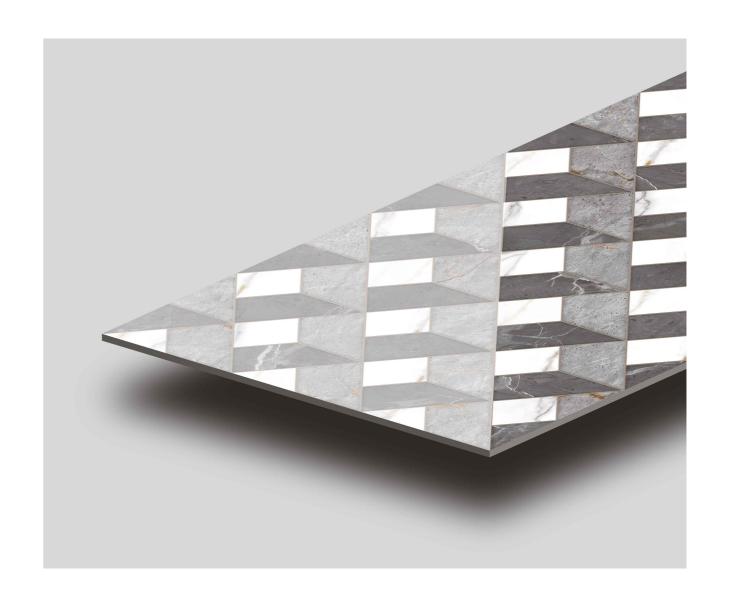



# WORKING WITH THE VARIOUS VERSIONS OF TILES FINISH


#### **CUTTING WITH DIAMOND DISCS**






Our products can be cut using diamond discs fitted onto the hand-held electrical grinding machine. The speed of Disc rotation must be high (>10000 RPM) and should have a low feed rate (< 1 m/min). Itmay be required to cool the disc with water. Recommended discs are the thin typesgenerally used for cutting porcelain stoneware. The surface should be kept on a FLAT base while cutting without any gap underneath

#### DRILLING





You can use cutting discs fitted to battery-operated screwdrivers or angle grinders, electrical drills as an alternative.

#### INTERNAL CUT / L-SHAPED CUT




To get internal and L-shaped corners & to reduce the risk of breakage. round o the vertex of the internal corner using bits with a radius of at least 5mm. Then cut with diamond discs, be cautious to stop moving the cutting tool forward. To drill and cut using diamond discs, follow the instructions provided above.


#### When using these tools:

- -Cool the point being drilled with water
- -Don't put too much pressure and bear in mind the resistance of the type of laminated stoneware you are working on
- -If you are using tungsten bits, start drilling at a low speed
- -If you are using drills or screwdrivers, do not select hammering mode

#### **EDGE-FINISHING**









### MANUALLY TRANSPORTING PORCELAIN FINISH


Only for 1/4" Slabs


MOVING OUR TILES





#### RAISING TILE ONTO A BENCH







X INCORRECT

√ CORRECT

#### HANDLING TILES FOR WALL





X INCORRECT



#### **CLEANING & MAINTENCE**

Our products are non porous (due to their high quality raw materials, stringent production parameters and state of the art technology), hence any dust or deposited waste cannot penetrate the surface.

For most cases only a damp cloth is sufficient for cleaning.

Regular cleaning highlights the aesthetic features of the surface and gives it exceptional shine.

For highly aggressive cleaning caused by some common food and substances follow the table below.

TYPE OF STAIN	CHEMICAL PRODUCT	EXAMPLE
Grease	Alkaline - Solvent	Detergent
Oil	Solvent	Ammonia, Backing Soda
Ink	Oxidant - Solvent	Alcohol, Liquid Bleach, Nail Paint Remover
Rust	Acid	Hydrochloric Acid, Vinegar, Red Harpic
Lime	Acid	Descaling Reagent, Hydro Chloric Acid
Cement	Acid	Hydro Chloric Acid
Wine	Alkaline	Ammonia, Liquid Bleach
Coffee	Alkaline - Solvent	Ammonia, Liquid Bleach
Rubber	Solvent	Alcohol, Thinner
Plaster	Acid	Hydro Chloric Acid
Candle Wax	Solvent	Alcohol, Thinner
lodine	Oxidant	Liquid Bleach
Blood	Oxidant	Liquid Bleach
Ice Cream	Alkaline	Liquid Bleach

Note: It is recommended that any kind of stain needs to get clean immediately / as soon as possible.

### **TECHNICAL SPECIFICATIONS**

CHARACTERISTIC	STANDARD AS PER ISO-13006/2018 En14411 gr.bla	MOTTO VALUE	TEST METHOD
	Regulatory Prope	erties	
Deviation in Length & Width	<u>+</u> 0.5%	<u>+</u> 0.2%	ISO 10545-2
Deviation in Thickness	<u>+</u> 5%	<u>+</u> 5%	ISO 10545-2
Straightness of Sides	<u>+</u> 0.5%	<u>+</u> 0.2%	ISO 10545-2
Rectangularity	<u>+</u> 0.5%	<u>+</u> 0.2%	ISO 10545-2
Surface Flatness	<u>+</u> 0.5%	<u>+</u> 0.3%	ISO 10545-2
Colour Difference	ΔE<1.00	∆E<0.30	ISO 10545-16
Glossiness	As per Mfg.	As Per Mfg.	GlossMeter
	Structural Prope	rties	
Water Absorption	≤0.5 %	≤0.3 %	ISO 10545-3
Apparent Density	As Per Mfg.	>2.20 g/cc	ISO 10545-3
	Massive Mechanical F	Properties	
Modulus of Repture	Min.35N/mm²	Min.40N/mm²	ISO 10545-4
Breaking Strength	Min. 1300 N	Min. 2000 N	ISO 10545-4
Impact Resistance	As per Mfg.	Min. 0.55	ISO 10545-4
	Surface Mechanical F	Properties	
Surface Abrasion Resistance	As per Mfg.	Min. class 3	ISO 10545-7
Moh's Hardness	As per Mfg.	Min. class 4	BS EN 15771
	Thermo Hygrometric F	Properties	
Frost Resistance	As Per Mfg.	Frost Proof	ISO 10545-12
Thermal Shock Resistance	Min. 10 Cycle	Min. 10 Cycle	ISO 10545-9
Moisture Expansion	Max. 0.6mm/m	Max. 0.02mm/m	ISO 10545-10
Thermal Expansion	Max. 9.0 x 10 <sup>-6</sup>	Max. 6.0x10 <sup>-6</sup>	ISO 10545-8
	Chemical Proper	rties	
Chemical Resistance	As Per Mfg.	No Damage	ISO 10545-13
Stain Resistance	Resistant	Resistant	ISO 10545-14
	Safety Properti	es	
Slip Resistance	As per Mfg.	N. A.	DIN 51130
Fire Resistance	As per Mfg.	Fire Proof	N. A.

#### **PACKING DETAILS**

Dimension ( mm )	No. of PC's/Box	Square Feet	Weight ( Approx )
800x1600mm	2 Pcs.	27.55 Sq. Feet	52 Kg.



### **MOTTO GROUP**

8-A N. H., Sartanpar Road, At. Sartanpar, Ta. Wankaner, Morbi - 363 621, Gujarat, India.

Email: info@mottogroup.in | www.mottogroup.in

Toll Free Number: 1800 123 2124 / +91 95123 80072