

DIGI MATT




800x2400mm
15mm Thickness

EDGE PROFILE

This design has been beautifully crafted with particular attention paid to different types of edges which help to not only understand the design pattern of different areas but also satisfy the requirements of the perfect fitting.



15MM THICKNESS



Big Bevel



Double Bevel



Crescent



Small Bevel



Top Radius



Birds beak



45° corner





Soft corner

Joint Possibilities



FEATURES THAT SUITS IN EVERY NEED

Since the turn of the coming decades, beauty-inspired carved tiles have established a permanent place in the industry. In addition to the features listed below, these tiles have a wide range of additional features that make them more fashionable, trending, and comfortable to use overall.

 UNALTERABLE TO UV RAYS	 FIRE RESISTANT	 IMPERVIOUS	 LIGHTNESS	 LOW ABSORPTION
 FROST ATTACK	 RESISTANT TO CHEMICAL ATTACK	 RESISTANT TO STAINS	 FAST ASSEMBLY	 100% RECYCLABLE



APPROACH AREA

Incorporating the touch of luxurious comfort into your ambiance that reflects the essence of royalty while infusing the invigorating color and design that will be beautifully changing the atmosphere with the wow factor that can be used in many areas.

With all of the designs, your ambiance will be infused with luxury touches that will knock your socks off. We strive to bring you the very best of excellence for your decor, that not only enhances & enhances the best design options, but also improves the quality!

An influx of natural beauty into a space can immediately create a stunning appearance that draws attention with the addition of our collection!



kitchen



living room



dining room



lumber room



children`s room



bedroom



bathroom



lavatory



work place



garret



basement



loggia



patio





terrace



pool

DIGI MATT

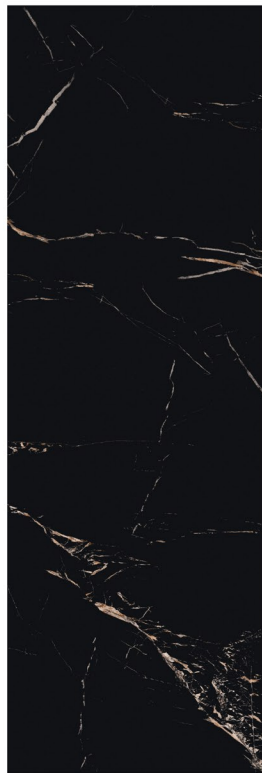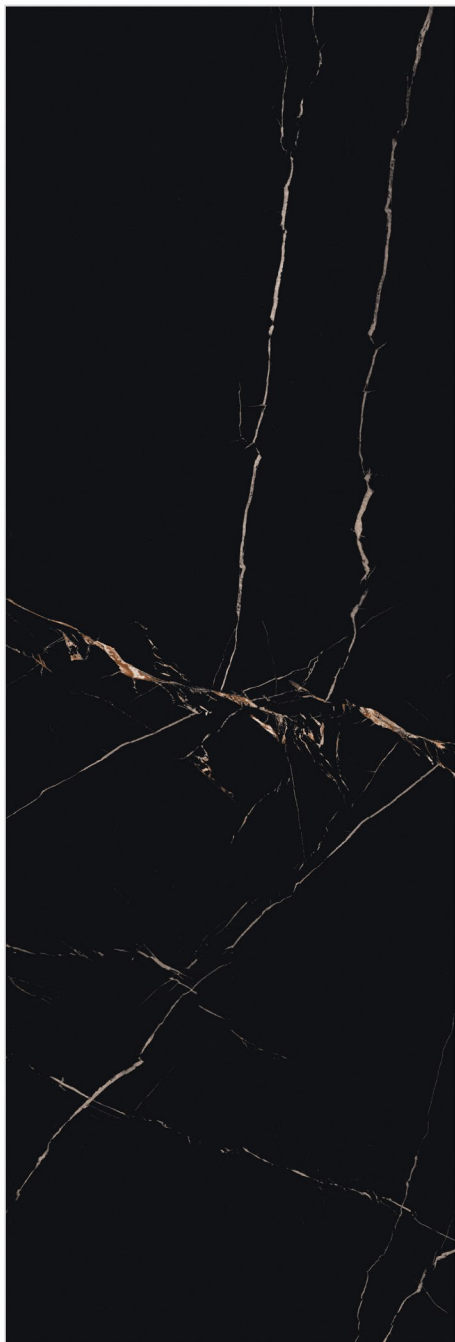

DELIGHT MARQUINA

Available size:
800x2400mm

Thickness
15mm

Finish
Digi Matt

Design
Random (3 Phase)




scan or touch
for virtual





DIGI MATT

DIGI MATT

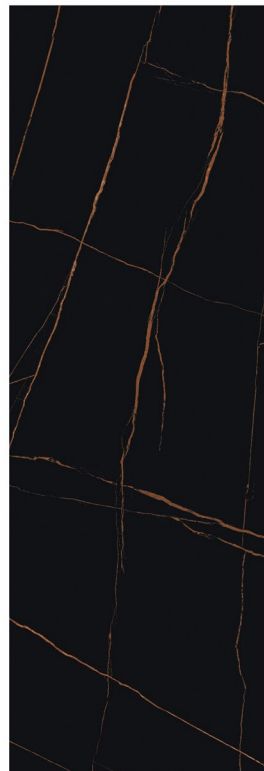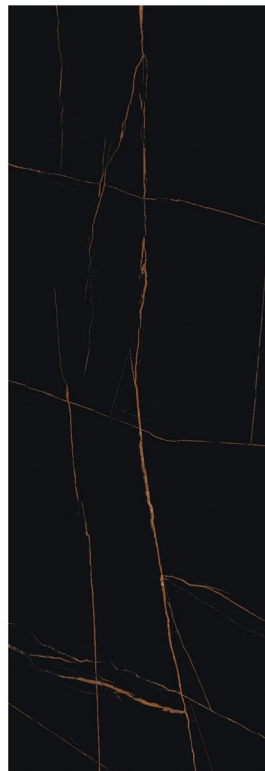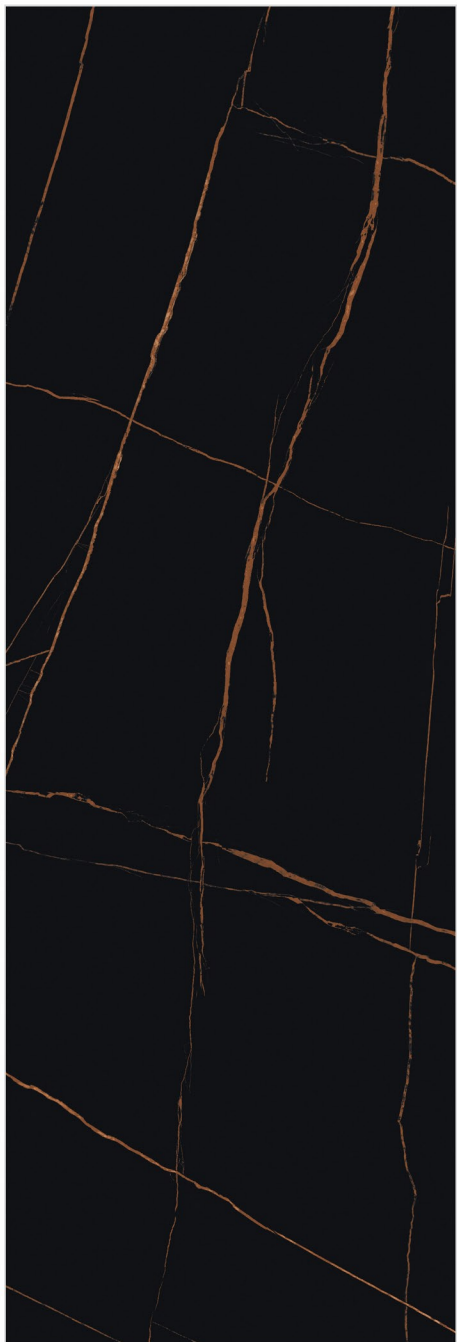

LAURENT

Available size:
800x2400mm

Thickness
15mm

Finish
Digi Matt

Design
Random (3 Phase)

scan or touch
for virtual





DIGI MATT

DIGI MATT

MAGNIFICA

Available size :
800x2400mm

Thickness
15mm

Finish
Digi Matt

Design
Random (2 Phase)

scan or touch
for virtual





DIGI MATT



ANTIQUE GREY

Available size:
800x2400mm

Thickness
15mm

Finish
Digi Matt

Design
Random (3 Phase)

scan or touch
for virtual



DIGI MATT



PIETRA GREY

Available size :
800x2400mm

Thickness
15mm

Finish
Digi Matt

Design
Random (3 Phase)



scan or touch
for virtual





DIGI MATT

DIGI MATT

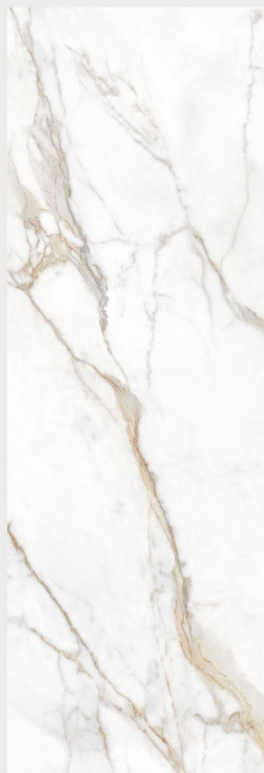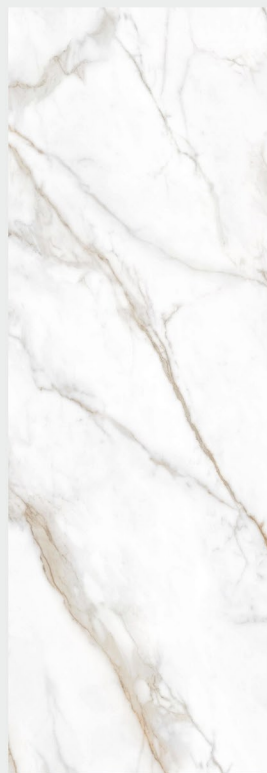

DIAMOND GOLD

Available size :
800x2400mm

Thickness
15mm

Finish
Digi Matt

Design
End Less (3 Phase)



scan or touch
for virtual





DIGI MATT

DIGI MATT

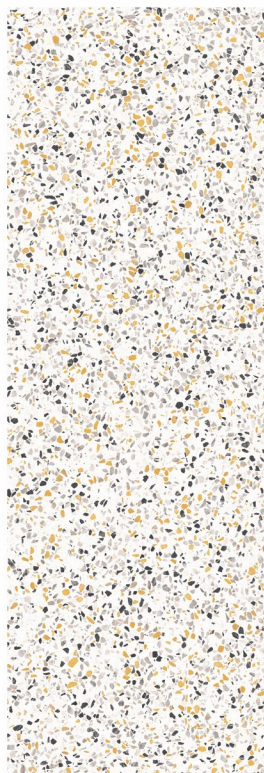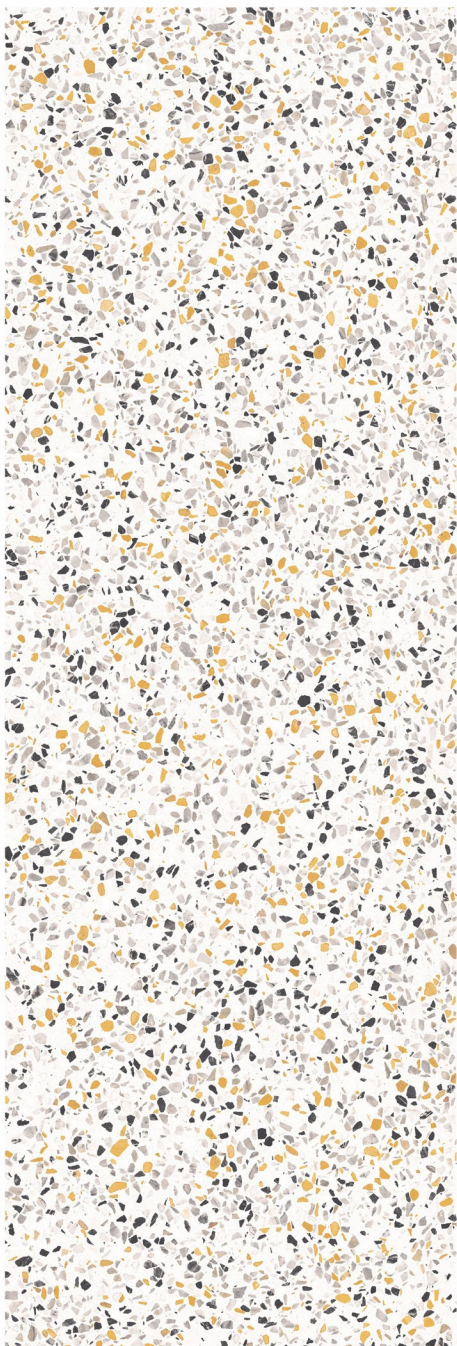

TROPICAL GLAM

Available size:
800x2400mm

Thickness
15mm

Finish
Digi Matt

Design
Random (2 Phase)

scan or touch
for virtual





DIGI MATT

DIGI MATT



SAHARA WHITE

Available size:
800x2400mm

Thickness
15mm

Finish
Digi Matt

Design
End Less (2 Phase)




scan or touch
for virtual





DIGI MATT

DIGI MATT

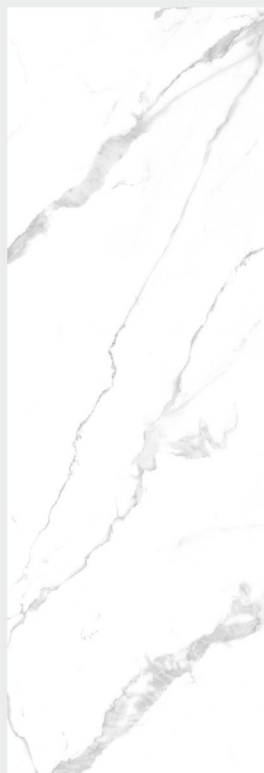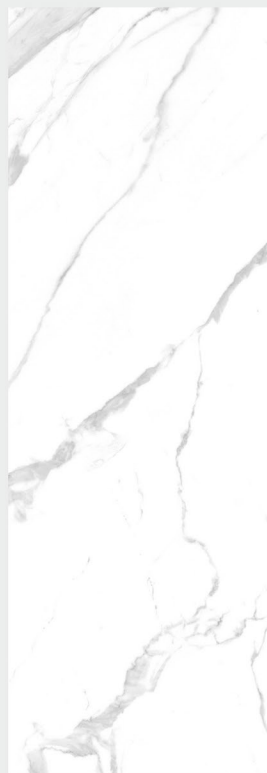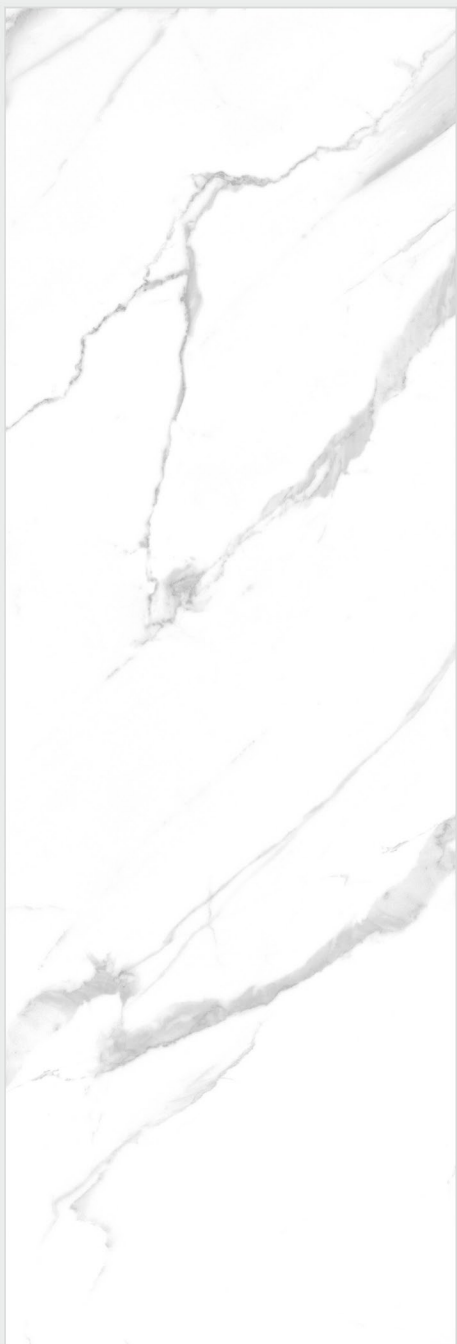

STATUARIO VOLAKAS

Available size:
800x2400mm

Thickness
15mm

Finish
Digi Matt

Design
End Less (3 Phase)

*scan or touch
for virtual*





DIGI MATT

DIGI MATT

LASA BIANCO

Available size :
800x2400mm

Thickness
15mm

Finish
Digi Matt

Design
Random (2 Phase)

*scan or touch
for virtual*





DIGI MATT



TERRAZZO WHITE

Available size:
800x2400mm

Thickness
15mm

Finish
Digi Matt

Design
Single Phase



scan or touch
for virtual





DIGI MATT

DIGI MATT

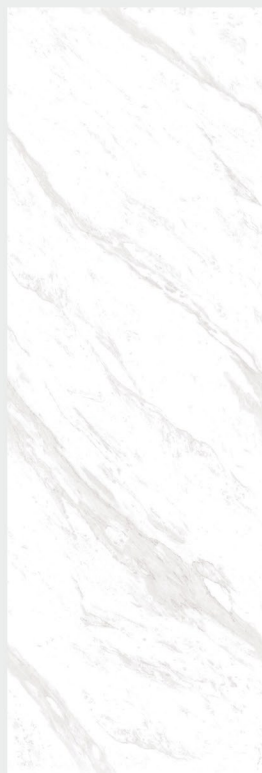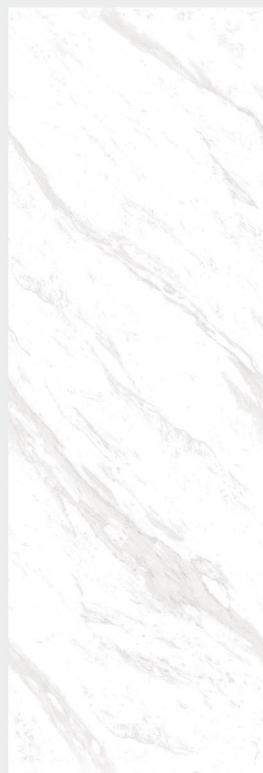

SILVER SILK

Available size :
800x2400mm

Thickness
15mm

Finish
Digi Matt

Design
End Less (1 Phase)

scan or touch
for virtual





DIGI MATT

DIGI MATT



ANTALYA WHITE

Available size:
800x2400mm

Thickness
15mm

Finish
Digi Matt

Design
Random (2 Phase)

scan or touch
for virtual





DIGI MATT

DIGI MATT



CALACATTA IMPERIALE

Available size:
800x2400mm

Thickness
15mm

Finish
Digi Matt

Design
Random (3 Phase)

scan or touch
for virtual





DIGI MATT



MICHAEL ANGELO

Available size:
800x2400mm

Thickness
15mm

Finish
Digi Matt

Design
Random (2 Phase)

scan or touch
for virtual






DIGI MATT

UNIQUE DESIGNS OF 800X2400MM

You will be able to enjoy the comfort of your kitchen with the warmth of the environment that enhances the elegance of the style segment with the classic touch element. 15 different styles are available in 15 different look perspectives.





800X2400MM

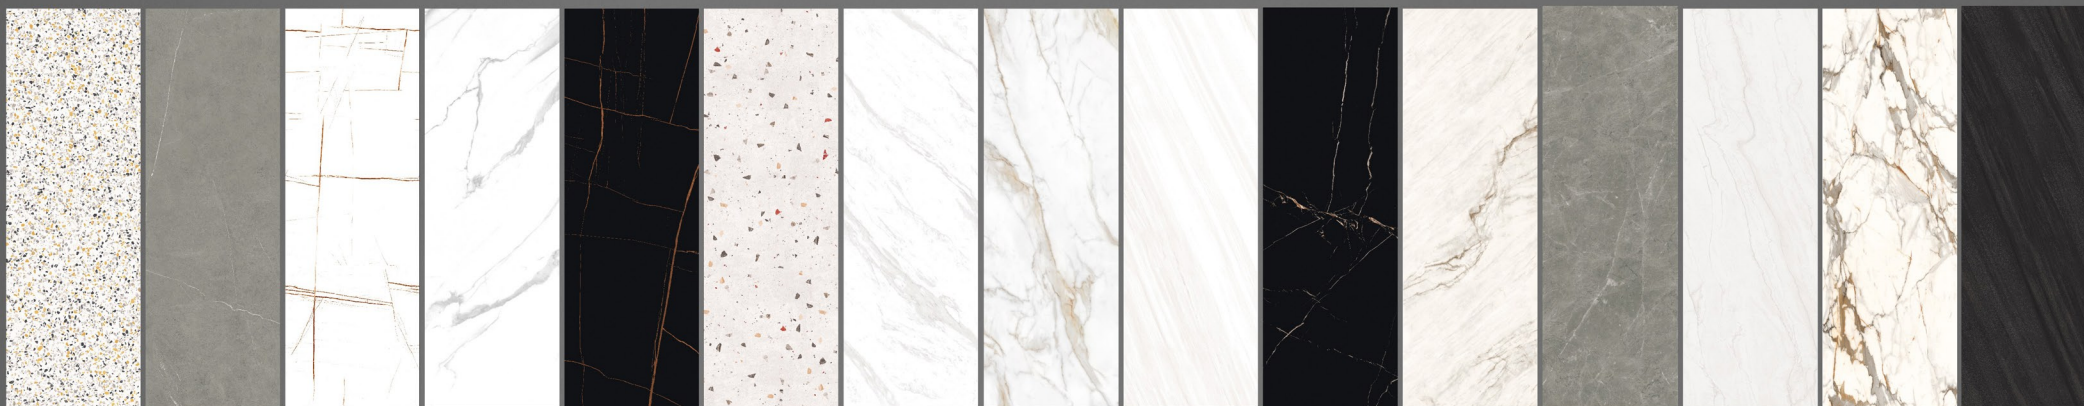


MANUALLY TRANSPORTING DIGI MATT

Only for 1/4" Slabs

MOVING A DIGI MATT

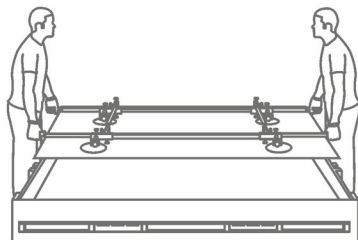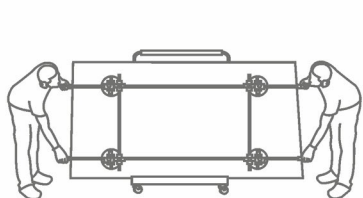

RAISING A DIGI MATT ONTO A BENCH




✗ INCORRECT




✓ CORRECT

HANDLING DIGI MATT FOR WALL

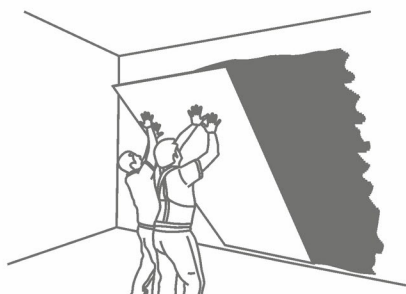

✗ INCORRECT

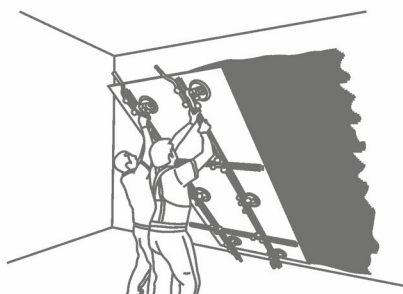

✓ CORRECT

WORKING WITH THE VARIOUS VERSIONS OF DIGI MATT

CUTTING WITH DIAMOND DISCS



Our products can be cut using diamond discs fitted onto the hand-held electrical grinding machine. The speed of Disc rotation must be high (>10000 RPM) and should have a low feed rate (< 1 m/min). It may be required to cool the disc with water. Recommended discs are the thin types generally used for cutting porcelain stoneware. The surface should be kept on a FLAT base while cutting without any gap underneath.

DRILLING



You can use cutting discs fitted to battery-operated screwdrivers or angle grinders, electrical drills as an alternative.

INTERNAL CUT / L-SHAPED CUT





To get internal and L-shaped corners & to reduce the risk of breakage, round off the vertex of the internal corner using bits with a radius of at least 5mm. Then cut with diamond discs, be cautious to stop moving the cutting tool forward. To drill and cut using diamond discs, follow the instructions provided above.

When using these tools:

- Cool the point being drilled with water
- Don't put too much pressure and bear in mind the resistance of the type of laminated stoneware you are working on
- If you are using tungsten bits, start drilling at a low speed
- If you are using drills or screwdrivers, do not select hammering mode

EDGE-FINISHING





CLEANING & MAINTENCE

Our products are non porous (due to their high quality raw materials, stringent production parameters and state of the art technology), hence any dust or deposited waste cannot penetrate the surface.

For most cases only a damp cloth is sufficient for cleaning.

Regular cleaning highlights the aesthetic features of the surface and gives it exceptional shine.

For highly aggressive cleaning caused by some common food and substances follow the table below.

TYPE OF STAIN	CHEMICAL PRODUCT	EXAMPLE
Grease	Alkaline - Solvent	Detergent
Oil	Solvent	Ammonia, Backing Soda
Ink	Oxidant - Solvent	Alcohol, Liquid Bleach, Nail Paint Remover
Rust	Acid	Hydrochloric Acid, Vinegar, Red Harpic
Lime	Acid	Descaling Reagent, Hydro Chloric Acid
Cement	Acid	Hydro Chloric Acid
Wine	Alkaline	Ammonia, Liquid Bleach
Coffee	Alkaline - Solvent	Ammonia, Liquid Bleach
Rubber	Solvent	Alcohol, Thinner
Plaster	Acid	Hydro Chloric Acid
Candle Wax	Solvent	Alcohol, Thinner
Iodine	Oxidant	Liquid Bleach
Blood	Oxidant	Liquid Bleach
Ice Cream	Alkaline	Liquid Bleach

Note: It is recommended that any kind of stain needs to get clean immediately / as soon as possible.

TECHNICAL SPECIFICATION

CHARACTERISTIC	STANDARD AS PER ISO-13006/2018 En14411 gr.bla	MOTTO VALUE	TEST METHOD
Regulatory Properties			
Deviation in Length & Width	±0.5%	±0.2%	ISO 10545-2
Deviation in Thickness	±5%	±5%	ISO 10545-2
Straightness of Sides	±0.5%	±0.2%	ISO 10545-2
Rectangularity	±0.5%	±0.2%	ISO 10545-2
Surface Flatness	±0.5%	±0.3%	ISO 10545-2
Colour Difference	ΔE<1.00	ΔE<0.30	ISO 10545-16
Glossiness	As per Mfg.	As per Mfg.	Gloss Meter
Structural Properties			
Water Absorption	≤0.5 %	≤0.3 %	ISO 10545-3
Apparent Density	As Per Mfg.	>2.20 g/cc	ISO 10545-3
Massive Mechanical Properties			
Moduls of Repture	Min.35N/mm²	Min.40N/mm²	ISO 10545-4
Breaking Strength	Min. 1300 N	Min. 5000 N	ISO 10545-4
Impact Resistance	As per Mfg.	Min. 0.55	ISO 10545-4
Surface Mechanical Properties			
Surface Abrasion Resistance	As per Mfg.	Min. class 3	ISO 10545-7
Moh's Hardness	As per Mfg.	Min. class 4	BS EN 15771
Thermo Hygrometric Properties			
Frost Resistance	As Per Mfg.	Frost Proof	ISO 10545-12
Thermal Shock Resistance	Min. 10 Cycle	Min. 10 Cycle	ISO 10545-9
Moisture Expansion	Max. 0.6mm/m	Max. 0.02mm/m	ISO 10545-10
Thermal Expansion	Max. 9.0 x 10 ⁻⁶	Max. 6.0x10 ⁻⁶	ISO 10545-8
Chemical Properties			
Chemical Resistance	As Per Mfg.	No Damage	ISO 10545-13
Stain Resistance	Resistant	Resistant	ISO 10545-14
Safety Properties			
Slip Resistance	As per Mfg.	N. A.	DIN 51130
Fire Resistance	As per Mfg.	Fire Proof	N. A.

PACKING DETAILS

DIMENSION [mm]	No of PC's/ Box	SQUARE FEET	WEIGHT [APPROX]
800x2400mm	1	20.66	68 Kgs

Take note : Please follow the Company's guidelines for cutting and applying tiles. This will ensure quality and remarkable results.



MOTTO STONE PVT. LTD.

8-A, National Highway, Sartanpar Road, At. Sartanpar,
Ta. Wankaner, Morbi - 363 621, Gujarat, INDIA.

Mail. info@mottogroup.in, **Web.** www.mottogroup.in

Toll-free. 1800 123 2124

Call. +91 95123 80072