



TIMELESS ELEGANCE



SICILIAN
SERIES



800x1600mm

9mm Thickness

SICILIAN SERIES

Introducing our Sicilian Collection, featuring an exceptional GHR Surface designed to mimic the natural textures of stones.

The Granula Effects create a rich, tactile finish that adds depth and dimension to each tile. Inspired by Italian architecture, this collection is available in four elegant color shades and measures 800x1600mm, perfect for enhancing any space with a sophisticated touch. Experience the perfect blend of art and nature.



infinite shades of matter and light

The Surfaces embrace the delicate balance between texture and light, creating surfaces that shift in tone and depth throughout the day. Inspired by nature's raw beauty and Italian architecture, these tiles offer a palette of timeless shades, enhancing your spaces with elegance and subtle sophistication.



Glorify Every
Ambiance





ETERNAL
BEAUTY

PRODUCTS INSPIRATION

The Sicilian Collection draws its inspiration from the rich heritage of Italian architecture and the raw beauty of natural stones.







Each tile reflects the timeless elegance of Sicily's landscapes, bringing a harmonious blend of nature and craftsmanship into your spaces. Perfectly designed to elevate both interiors and exteriors, this collection captures the essence of organic textures and sophisticated style.

FEATURES




Exceptional features make our tiles the prime choice for every outdoors.

APPLICATIONS



Be it residential or commercial space, our surface perfectly suits every space due to its high durability.

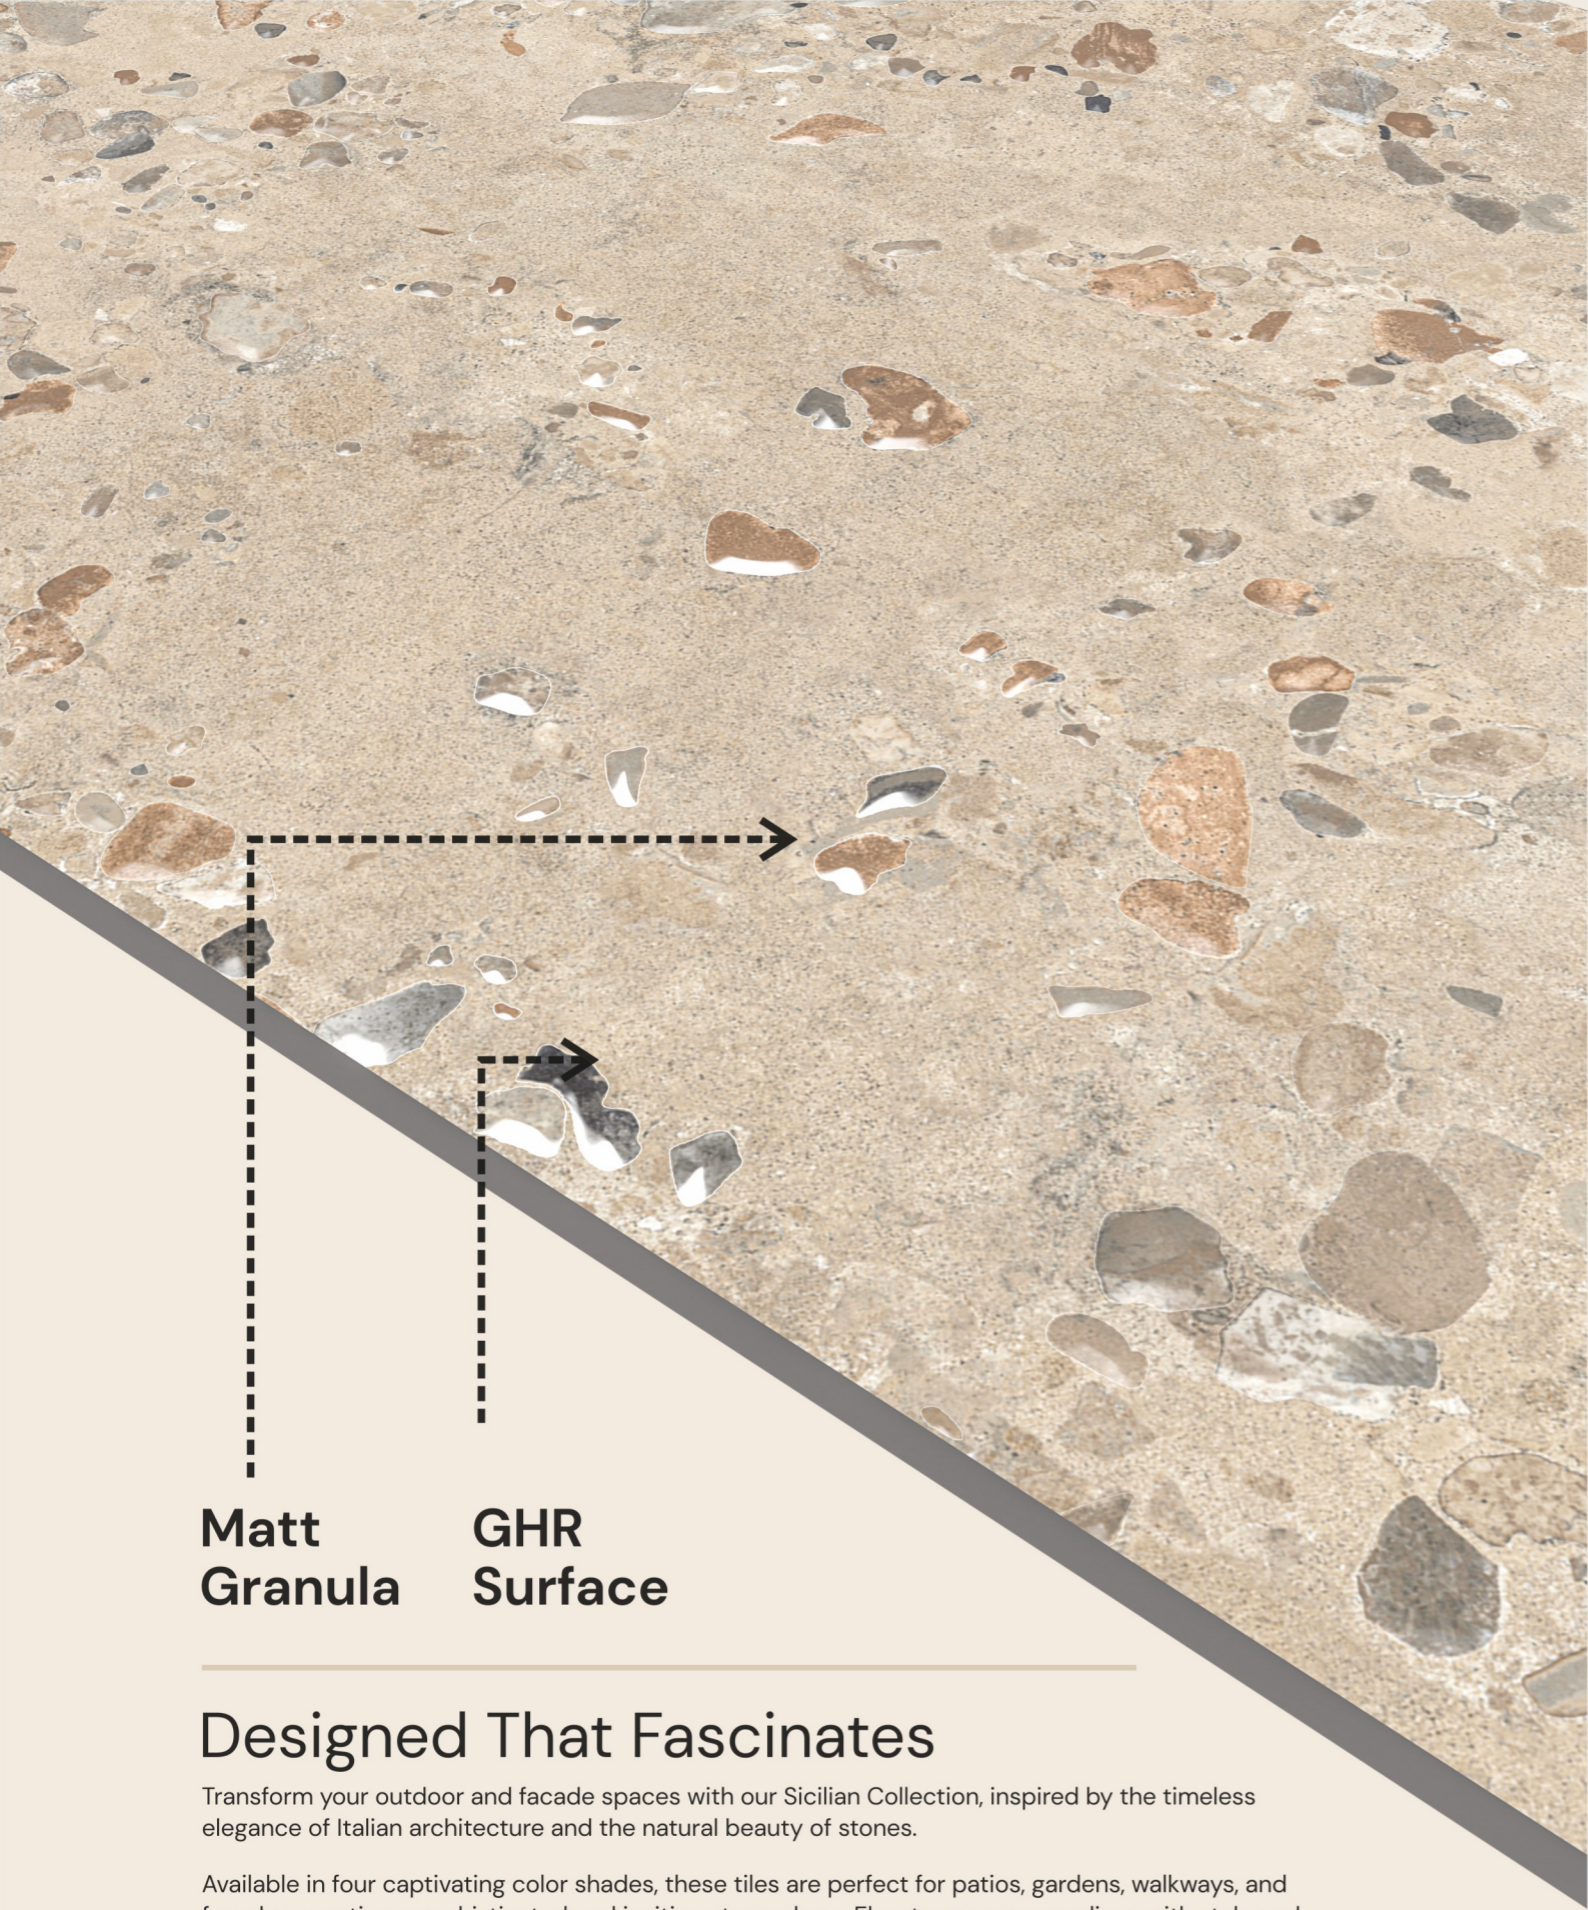

Size-
800x
1600mm

Thickness-
9mm

Finish-
GHR &
Matt Granula



4 COLOR SHADES



Matt Granula **GHR Surface**

Designed That Fascinates


Transform your outdoor and facade spaces with our Sicilian Collection, inspired by the timeless elegance of Italian architecture and the natural beauty of stones.

Available in four captivating color shades, these tiles are perfect for patios, gardens, walkways, and facades, creating a sophisticated and inviting atmosphere. Elevate your surroundings with style and grace!

Sicilian Clay



Design Name : Sicilian Clay
Size : 800x1600mm
Finish : GHR & Matt Granula
Design : Random
Thickness : 9mm

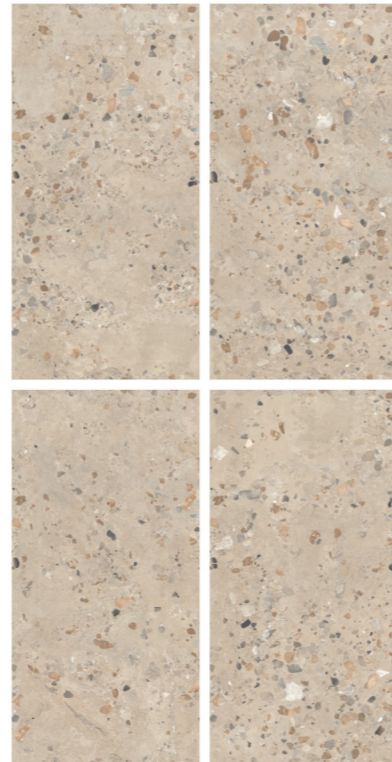

Scan For Virtual




Sicilian Clay



Sicilian Natural



Design Name : Sicilian Natural
Size : 800x1600mm
Finish : GHR & Matt Granula
Design : Random
Thickness : 9mm

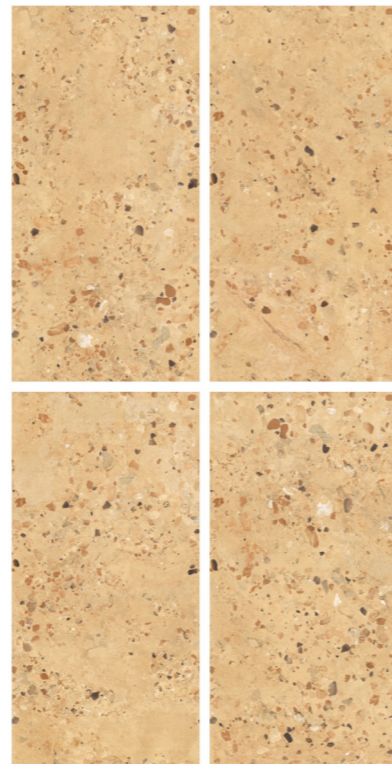

Scan For Virtual




Sicilian Natural



Sicilian Sand



Design Name : Sicilian Sand
Size : 800x1600mm
Finish : GHR & Matt Granula
Design : Random
Thickness : 9mm

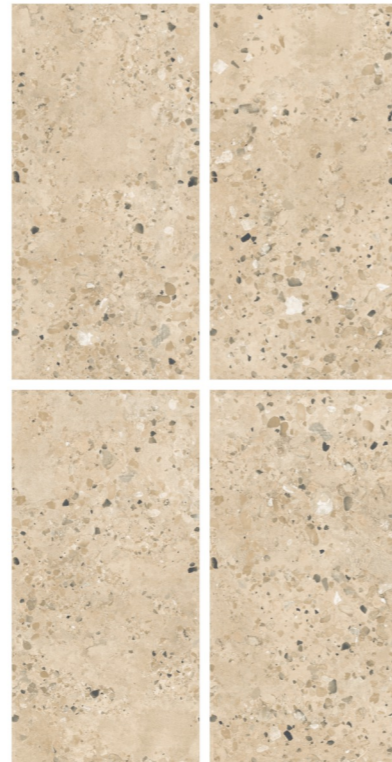

Scan For Virtual




Sicilian Sand



Sicilian Slate



Design Name : Sicilian Slate
Size : 800x1600mm
Finish : GHR & Matt Granula
Design : Random
Thickness : 9mm

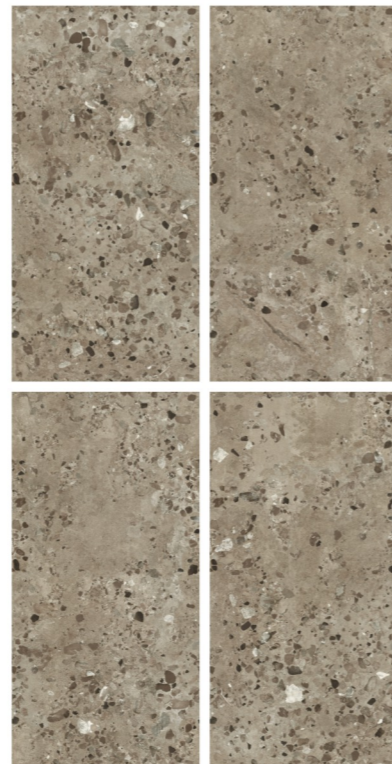

Scan For Virtual



Sicilian Slate



WORKING WITH THE VARIOUS VERSIONS OF TILES FINISH

CUTTING WITH DIAMOND DISCS




Our products can be cut using diamond discs fitted onto the hand-held electrical grinding machine. The speed of Disc rotation must be high (>10000 RPM) and should have a low feed rate (< 1 m/min). It may be required to cool the disc with water. Recommended discs are the thin types generally used for cutting porcelain stoneware. The surface should be kept on a FLAT base while cutting without any gap underneath

DRILLING



You can use cutting discs fitted to battery-operated screwdrivers or angle grinders, electrical drills as an alternative.

INTERNAL CUT / L-SHAPED CUT

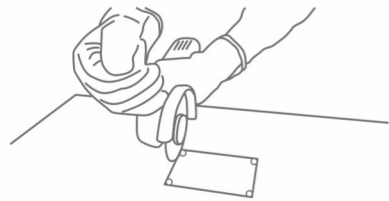


To get internal and L-shaped corners & to reduce the risk of breakage, round off the vertex of the internal corner using bits with a radius of at least 5mm. Then cut with diamond discs, be cautious to stop moving the cutting tool forward. To drill and cut using diamond discs, follow the instructions provided above.

When using these tools:

- Cool the point being drilled with water
- Don't put too much pressure and bear in mind the resistance of the type of laminated stoneware you are working on
- If you are using tungsten bits, start drilling at a low speed
- If you are using drills or screwdrivers, do not select hammering mode



EDGE-FINISHING

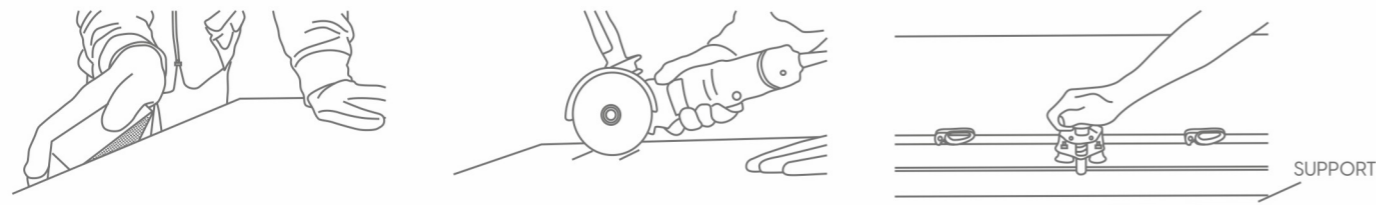


MANUALLY TRANSPORTING PORCELAIN FINISH

Only for 1/4" Slabs


MOVING OUR TILES

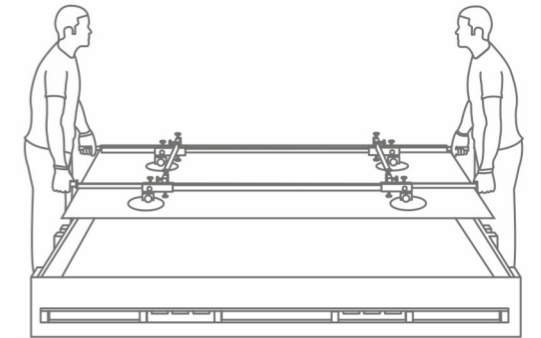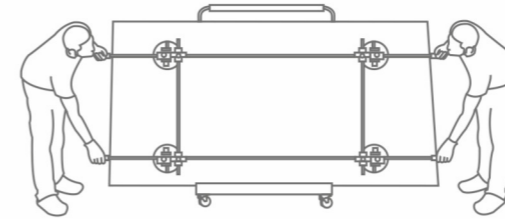

RAISING TILE ONTO A BENCH

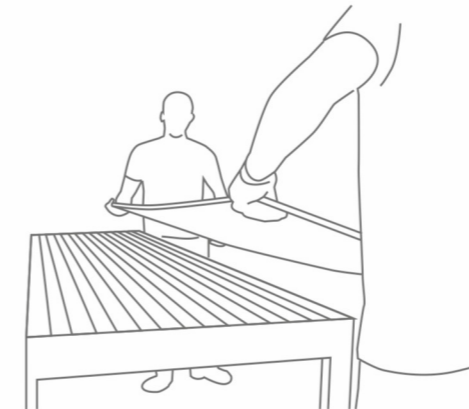


✗ INCORRECT

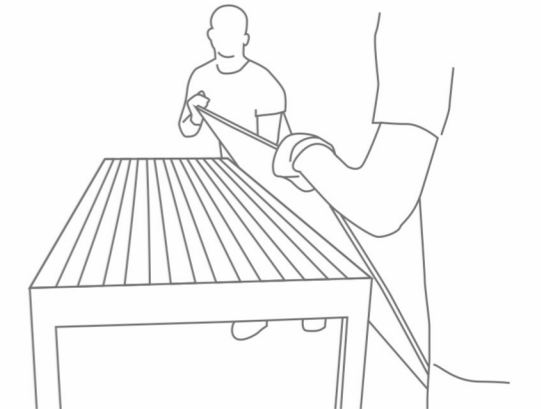


✓ CORRECT

HANDLING TILES FOR WALL

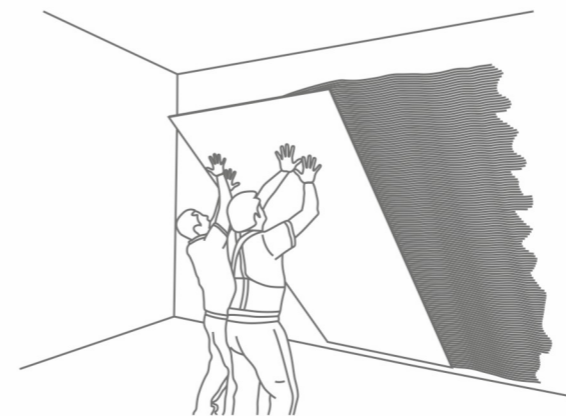

✗ INCORRECT

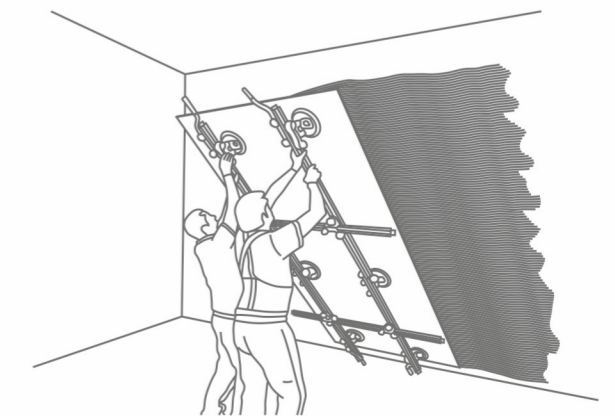

✓ CORRECT

CLEANING & MAINTENANCE

Our products are non porous (due to their high quality raw materials, stringent production parameters and state of the art technology), hence any dust or deposited waste cannot penetrate the surface.

For most cases only a damp cloth is sufficient for cleaning.

Regular cleaning highlights the aesthetic features of the surface and gives it exceptional shine.

For highly aggressive cleaning caused by some common food and substances follow the table below.

TYPE OF STAIN	CHEMICAL PRODUCT	EXAMPLE
Grease	Alkaline - Solvent	Detergent
Oil	Solvent	Ammonia, Backing Soda
Ink	Oxidant - Solvent	Alcohol, Liquid Bleach, Nail Paint Remover
Rust	Acid	Hydrochloric Acid, Vinegar, Red Harpic
Lime	Acid	Descaling Reagent, Hydro Chloric Acid
Cement	Acid	Hydro Chloric Acid
Wine	Alkaline	Ammonia, Liquid Bleach
Coffee	Alkaline - Solvent	Ammonia, Liquid Bleach
Rubber	Solvent	Alcohol, Thinner
Plaster	Acid	Hydro Chloric Acid
Candle Wax	Solvent	Alcohol, Thinner
Iodine	Oxidant	Liquid Bleach
Blood	Oxidant	Liquid Bleach
Ice Cream	Alkaline	Liquid Bleach

Note: It is recommended that any kind of stain needs to get clean immediately / as soon as possible.

TECHNICAL SPECIFICATIONS

CHARACTERISTIC	STANDARD AS PER ISO-13006/2018 En14411 gr.bla	MOTTO VALUE	TEST METHOD
Regulatory Properties			
Deviation in Length & Width	±0.5%	±0.2%	ISO 10545-2
Deviation in Thickness	±5%	±5%	ISO 10545-2
Straightness of Sides	±0.5%	±0.2%	ISO 10545-2
Rectangularity	±0.5%	±0.2%	ISO 10545-2
Surface Flatness	±0.5%	±0.3%	ISO 10545-2
Colour Difference	ΔE<1.00	ΔE<0.30	ISO 10545-16
Glossiness	As per Mfg.	As Per Mfg.	GlossMeter
Structural Properties			
Water Absorption	≤0.5 %	≤0.3 %	ISO 10545-3
Apparent Density	As Per Mfg.	>2.20 g/cc	ISO 10545-3
Massive Mechanical Properties			
Modulus of Repture	Min.35N/mm ²	Min.40N/mm ²	ISO 10545-4
Breaking Strength	Min. 1300 N	Min. 2000 N	ISO 10545-4
Impact Resistance	As per Mfg.	Min. 0.55	ISO 10545-4
Surface Mechanical Properties			
Surface Abrasion Resistance	As per Mfg.	Min. class 3	ISO 10545-7
Moh's Hardness	As per Mfg.	Min. class 4	BS EN 15771
Thermo Hygrometric Properties			
Frost Resistance	As Per Mfg.	Frost Proof	ISO 10545-12
Thermal Shock Resistance	Min. 10 Cycle	Min. 10 Cycle	ISO 10545-9
Moisture Expansion	Max. 0.6mm/m	Max. 0.02mm/m	ISO 10545-10
Thermal Expansion	Max. 9.0 x 10 ⁻⁶	Max. 6.0x10 ⁻⁶	ISO 10545-8
Chemical Properties			
Chemical Resistance	As Per Mfg.	No Damage	ISO 10545-13
Stain Resistance	Resistant	Resistant	ISO 10545-14
Safety Properties			
Slip Resistance	As per Mfg.	N. A.	DIN 51130
Fire Resistance	As per Mfg.	Fire Proof	N. A.

PACKING DETAILS

Dimension (mm)	No. of PC's/Box	Square Feet	Weight (Approx)
800x1600mm	2 Pcs.	27.55 Sq. Feet	52 Kg.



MOTTO GROUP

8-A, National Highway, Sartanpar Road, At. Sartanpar,
Ta. Wankaner, Morbi - 363 621, Gujarat, INDIA

Mail. info@mottogroup.in, **Web.** www.mottogroup.in

Toll-free. 1800 123 2124

Call. +91 95123 80072

Scan for Catalogue

